

DATA SHEET BALANCE BALL SPIN Ø500

Text for invitation to tender | Item No: 161500

SAFEFLOOR
Innovative solutions for safe play

MATERIALS | SCOPE OF SUPPLY

Balance ball Spin, pre-mounted completely


Rubber ball:	half rubber balls made of EPDM granules, 2 pieces
Moving element:	stainless steel blank with ball bearing, 1 piece
Pedestal:	stainless steel, V2A
Foundation anchor:	galvanized steel

TECHNICAL INFORMATION

Dimensions:

Main dimension:	Ø 500 mm
Height:	650 mm
Weight:	60 kg
Capacity:	acc. to normative requirements
Dimension largest piece:	Ø500 x 1110 mm
Heaviest piece:	54 kg

Max. fall height:	650 mm
Impact area:	9,62 m ²
Required safety slabs:	12,25 m ²
Required lawn grating:	16,00 m ²
Recommended surface material:	grass, sand, wood chip, gravel, synth. impact protection




INSTALLATION

Foundations: 1

Modified installation depth possible (special edition)

Installation according to our detailed mounting instructions, see www.safefloor.dk



DATA SHEET BALANCE BALL SPIN & TILT Ø500

Text for invitation to tender | Item No: 162500

SAFEFLOOR
Innovative solutions for safe play

MATERIALS | SCOPE OF SUPPLY

Play equipment, pre-mounted,
rotates and springs

Ball:	EPDM granules
Spring:	spring steel Ø 20 mm Ø 200 x 200 mm height
Bearing bracket:	galvanized steel, 2 bearing units inside, 1 piece
Cone:	EPDM caoutchouc
Foundation anchor:	galvanized steel

TECHNICAL INFORMATION

Dimensions:


Main dimension:	Ø500 mm
Height:	600 mm
Weight:	95 kg
Capacity:	acc. to normative requirements
Dimension largest piece:	500 x 500 x 1100 mm
Heaviest piece:	95 kg

Max. fall height:	600 mm
Impact area:	9,62 m ²
Required safety slabs:	12,25 m ²
Required lawn grating:	16,00 m ²
Recommended surface material:	grass, sand, wood chip, gravel, synth. impact protection




INSTALLATION

Foundations: 1

Installation according to our detailed mounting instructions, see www.safefloor.dk



Several balanceballs can be installed as a group, according to DIN EN 1176-1 3.20.

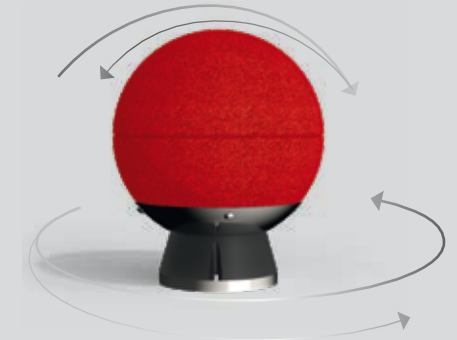

DATA SHEET BALANCE BALL SPIN & TILT Ø750

Text for invitation to tender | Item No: 162750

SAFEFLOOR
Innovative solutions for safe play

MATERIALS | SCOPE OF SUPPLY

Play equipment, pre-mounted,
rotates and springs



Ball:	EPDM granules
Spring:	spring steel Ø 20 mm Ø 200 x 200 mm height
Bearing bracket:	galvanized steel, 2 bearing units inside, 1 piece
Cone:	EPDM caoutchouc
Foundation anchor:	galvanized steel

TECHNICAL INFORMATION

Dimensions:

Main dimension:	Ø750 mm
Height:	850 mm
Weight:	144 kg
Capacity:	acc. to normative requirements
Dimension largest piece:	Ø750 x 1350 mm
Heaviest piece:	144 kg


Max. fall height:	850 mm
Impact area:	11,04 m ²
Required safety slabs:	16,00 m ²
Required lawn grating:	16,00 m ²
Recommended surface material:	grass, sand, wood chip, gravel, synth. impact protection



INSTALLATION

Foundations: 1

Installation according to our detailed mounting instructions, see www.safefloor.dk



Several balanceballs can be installed as a group, according to DIN EN 1176-1 3.20.